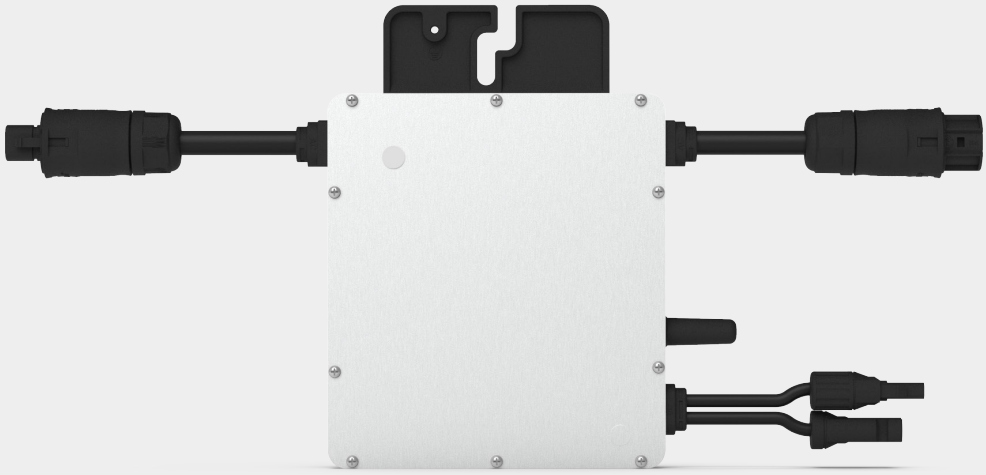


Microinverter Datasheet

HM-300N
HM-350N
HM-400N

Description

Hoymiles 1-in-1 microinverter, which can be connected to one panel and used in various applications, is one of the most flexible solar solutions. With the maximum DC voltage of 60 V, Hoymiles microinverter is a PV Rapid Shutdown Equipment and conforms with NEC-2017 and NEC-2020 Article 690.12 and CEC-2021 Sec 64-218.

All of the three models listed are equipped with reactive power control and are compliant with IEEE 1547, UL 1741, and CA Rule 21.

Features

01 Easy installation, just plug and play

02 With Reactive Power Control, compliant with CA Rule 21

03 Compliant with U.S. NEC-2017&NEC-2020 690.12 rapid shutdown

04 External antenna for stronger communication with DTU

05 High reliability: NEMA 6 (IP67) enclosure, 6000 V surge protection

© 2025 Hoymiles Power Electronics Inc. All rights reserved.
hoymiles.com
sales@hoymiles.com

Technical Specifications

Model	HM-300N		HM-350N		HM-400N	
Input Data (DC)						
Commonly used module power (W)[1]	240 to 405+		280 to 470+		320 to 540+	
Maximum input voltage (V)	60					
MPPT voltage range (V)	16-60					
Start-up voltage (V)	22					
Maximum input current (A)	11.5		11.5		12.5	
Maximum input short circuit current (A)	1 × 15					
Number of MPPTs	1					
Number of inputs per MPPT	1					
Output Data (AC)						
Peak output power (VA)	300		350		400	
Maximum continuous output power (VA)	295		349		382	
Maximum continuous output current (A)	1.23	1.42	1.45	1.68	1.59	1.84
Nominal output voltage/range (V)[2]	240/211-264	208/183-228	240/211-264	208/183-228	240/211-264	208/183-228
Nominal frequency/range (Hz)[2]	60/55-65					
Power factor (adjustable)	>0.99 default 0.8 leading ... 0.8 lagging					
Total harmonic distortion	<3%					
Maximum units per 12 AWG branch[3]	13	11	11	9	10	8
Efficiency						
CEC peak efficiency	96.7%					
CEC weighted efficiency	96.5%					
Nominal MPPT efficiency	99.8%					
Nighttime power consumption (mW)	<50					
Mechanical Data						
Ambient temperature range (°F)	-40 to +149 (-40°C to +65°C)					
Dimensions (W × H × D [in.])	7.17 × 6.46 × 1.16 (182 × 164 × 29.5 mm)					
Weight (lbs)	4.37 (1.98 kg)					
Enclosure rating	Outdoor-NEMA 6 (IP67)					
Cooling	Natural convection – No fans					
Features						
Communication	2.4 GHz Proprietary RF (Nordic)					
Monitoring	S-Miles Cloud (Hoymiles Monitoring Platform)					
Warranty	Up to 25 years					
Compliance	UL 1741, IEEE 1547, UL 1741 SA (240 Vac), UL 1741 SB, CA Rule 21 (240 Vac), CSA C22.2 No. 107.1-16, FCC Part 15B, FCC Part 15C					
PV Rapid Shutdown	Conforms with NEC-2017 and NEC-2020 Article 690.12 and CEC-2021 Sec 64-218 Rapid Shutdown of PV Systems					

*1 Within the allowable voltage and current range, the microinverter supports a DC/AC ratio of up to 1.5.
*2 Nominal voltage/frequency range can vary depending on local requirements.
*3 Refer to local requirements for exact number of microinverters per branch.

© 2025 Hoymiles Power Electronics Inc. All rights reserved.