


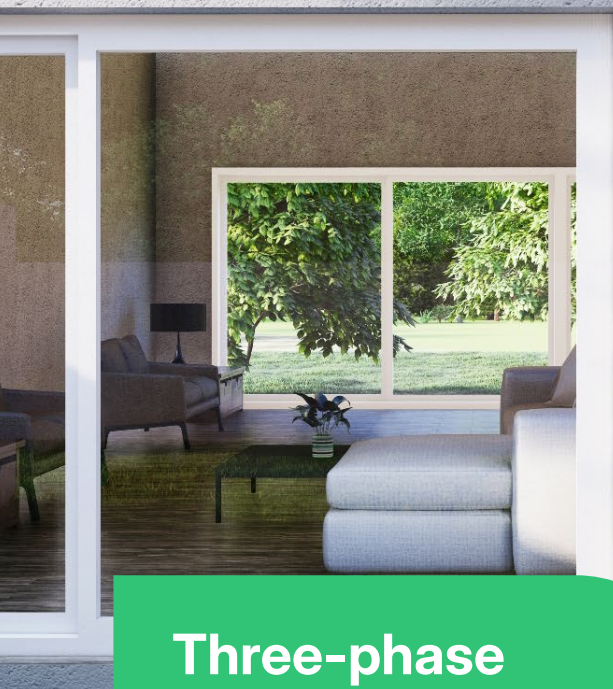

Three-phase Hybrid Inverter

HIT-5L-G3-AU
HIT-6L-G3-AU
HIT-8L-G3-AU
HIT-10L-G3-AU
HIT-12L-G3-AU
HIT-15L-G3-AU
HIT-17L-G3-AU
HIT-20L-G3-AU

Description

The HIT-(5-20)L-G3-AU series is a high-performance three-phase hybrid inverter with excellent reliability, including power classes ranging from 5 kW to 20 kW.

The intelligent EMS function supports self-consumption mode, economy mode, backup mode, peak shaving mode, and time of use mode for multi-scenario applications.

Monitoring management through S-Miles Cloud allows users to remotely diagnose and track the individual system performance over time, offering superior energy production.

Features

01

4 MPPTs with 20 A input; DC/AC oversizing up to 200%

02

100% unbalanced output; max. output of each phase up to 50% rated power

03

Support multiple intelligent working modes including Peak Shaving and 8×24h Time of Use

04

Integrated AI energy management with generator, heat pump and smart load

05

Max. 10 inverters in parallel for on-grid and off-grid system extension

06

Ultralight for easy installation and space-saving; unique built-in meter solution with up to 50 A bypass

Technical Specifications

Model	HIT-5L-G3-AU	HIT-6L-G3-AU	HIT-8L-G3-AU	HIT-10L-G3-AU	HIT-12L-G3-AU	HIT-15L-G3-AU	HIT-17L-G3-AU	HIT-20L-G3-AU
Battery								
Battery type	Li-ion/Lead-acid							
Battery voltage range (V)	40-60							
Max. charge/discharge current (A)	120/120	150/150	190/190	210/210	250/250	300/300	350/350	350/350
Charging strategy for Li-ion battery	Self-adaption to BMS							
Charging curve	3 Stages/Equalization							
External temperature sensor	Optional							
Communication	CAN							
PV Input								
Recommended max. PV power (W)	10000	12000	16000	20000	24000	30000	34000	40000
Max. input voltage (V)	1000							
Rated voltage (V)	720							
Start-up voltage (V)	150							
MPPT voltage range (V)	150-900							
Max. input current (A)	20/20	20/20	20/20/20	20/20/20	20/20/20/20	20/20/20/20	20/20/20/20	20/20/20/20
Max. short circuit current (A)	30/30	30/30	30/30/30	30/30/30	30/30/30/30	30/30/30/30	30/30/30/30	30/30/30/30
MPPT number/Max. input strings number	2/2	2/2	3/3	3/3	4/4	4/4	4/4	4/4
AC Input and Output (On-grid)								
Rated output power (W)	5000	6000	8000	9900	12000	15000	17000	20000
Rated output apparent power (VA)	5000	6000	8000	9900	12000	15000	17000	20000
Rated output current (A)	7.2	8.7	11.5	14.3	17.3	21.7	24.5	28.9
Grid form	3L/N/PE							
Rated AC output voltage/Range (V)	400, 280-480							
Rated grid frequency (Hz)	50/60							
Max. output current (A)	7.2	8.7	11.5	14.3	17.3	21.7	24.5	28.9
Power factor	>0.99 (0.8 leading ... 0.8 lagging)							
THDi (@rated output)	<3%							
AC Output (Back-up)								
Rated output power (W)	5000	6000	8000	10000	12000	15000	17000	20000
Max. output apparent power (VA) ⁽¹⁾	10000, 10s	12000, 10s	16000, 10s	20000, 10s	24000, 10s	30000, 10s	34000, 10s	40000, 10s
Back-up switch time (ms)	<10							
Grid form	3L/N/PE							
Rated output voltage (V)	400							
Rated output frequency (Hz)	50/60							
Max. continuous output current (A)	7.2	8.7	11.5	14.4	17.3	21.7	24.5	28.9
Max. continuous AC bypass current (A)	50							
THDv (@linear load)	<3%							
Efficiency								
MPPT efficiency					99.9%			
Max. efficiency	98.2%				98.5%			
EU efficiency	97.6%				98.0%			
Max. battery discharge to AC efficiency					95.7%			
Protection								
Anti-islanding protection					Integrated			
PV string input reverse polarity protection					Integrated			
Insulation resistor detection					Integrated			
Residual current monitoring unit					Integrated			
AC overcurrent protection					Integrated			
AC short current protection					Integrated			
AC overvoltage and undervoltage protection					Integrated			
Active anti-islanding method					Frequency Shift			
Surge protection					DC Type II / AC Type II			
Overvoltage category					III (Mains) , II (PV) (battery)			
General								
Dimensions (W × H × D [mm]) ⁽²⁾					539 × 696 × 232			
Weight (kg)					41			
Mounting					Wall mounting			
Operating temperature (°C)					-25 to +65 (>45, derating)			
Relative humidity					0-95%, no condensing			
Cooling	Natural convection		Smart fan					
Topology (Solar/Battery)					Transformerless/High-frequency isolation			
Protective class					I			
Altitude (m)					≤4000 (>2000, derating)			
Protection degree					IP66			
Noise (dB)	<45		<60					
User interface					LED, App			
Digital input/output					DRM, 2 × DI, 2 × DO			
Communication					RS485, Wi-Fi/Ethernet/4G (optional) ⁽³⁾			
Manufacturing country					China			
Certifications and Standards								
Grid connection standard	IEC 61727, IEC 62116, EN 50549, VDE-AR-N 4105							
Safety/EMC standard	IEC 62109-1/-2, EN 61000-6-1/-2/-3/-4							

(1) Can be achieved only if PV and battery power are sufficient.

(2) Excluding Connectors and Brackets.

(3) The DTS-4G solution will be coming soon.



Scan the QR code or visit our website
www.hoymiles.com/download-center.html to
access the manual.



Scan the QR code or visit our YouTube
www.youtube.com/@Hoymiles/videos
to access the Installation video.

Manufacturer Contact

Hoymiles Power Electronics Inc.

 No.18 Kangjing Road, Hangzhou 310015, China

 +86 571 2805 6101

 hoymiles.com

 service@hoymiles.com

Local Distributor Contact

HOYMILES POWER ELECTRONICS PTY LTD

 Unit 8/15 Ricketts Road Mount Waverley VIC 3149,
Australia

 +61 468052888

 service.au@hoymiles.com