

App Interface Introduction for End User

1. Brief Introduction of APP Interface

Hoymiles monitoring server provides the module level smart monitoring, end user can login the server through app to check the performance of PV system, module-level data in real time, operating status and download the energy and power reports etc.

2. How to start ?


2.1 Download end user APP firstly

IPhone phone please search hoymiles in App Store, Andriod phone please search hoymiles in Play Store.



2.2 Obtain the end user account and password

Please contact your distributor or installer to get the account and password, then input the account and password and click login.

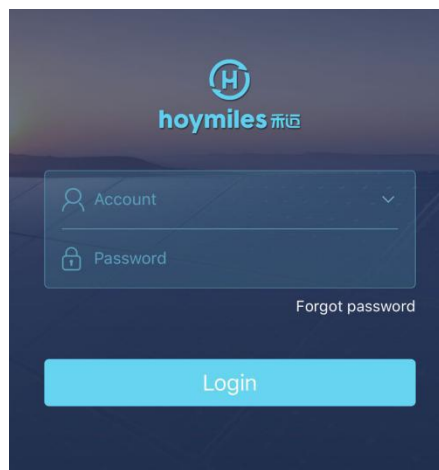


3. Interface Introduction

3.1 Power station homepage - display the statistics information.



3.2 Click the circle in the picture below to enter the income conversion interface.

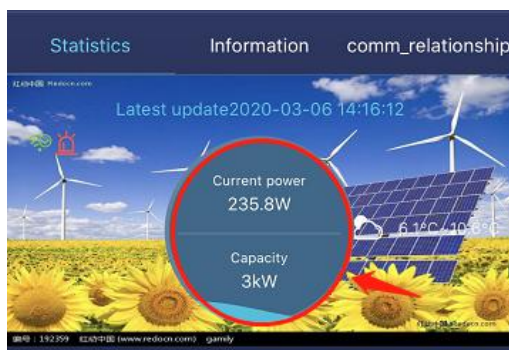



The 'Income conversion' interface has a title bar with a back arrow and the text 'Income conversion'. It contains several input fields: 'Unit price' (Please input), 'Currency unit' (Please input), 'Today energy(kWh)' (8.66), and 'Total energy(kWh)' (2797.78). Below these are 'Calculation results' for 'Today's income' (0.0) and 'Total income' (0.0). A large blue 'OK' button is at the bottom.

3.3 View daily, weekly, monthly, yearly, and total power generation.



3.4 Click one day you can look at the energy of that day, click on the zoom icon in the top right corner can see energy block diagram.

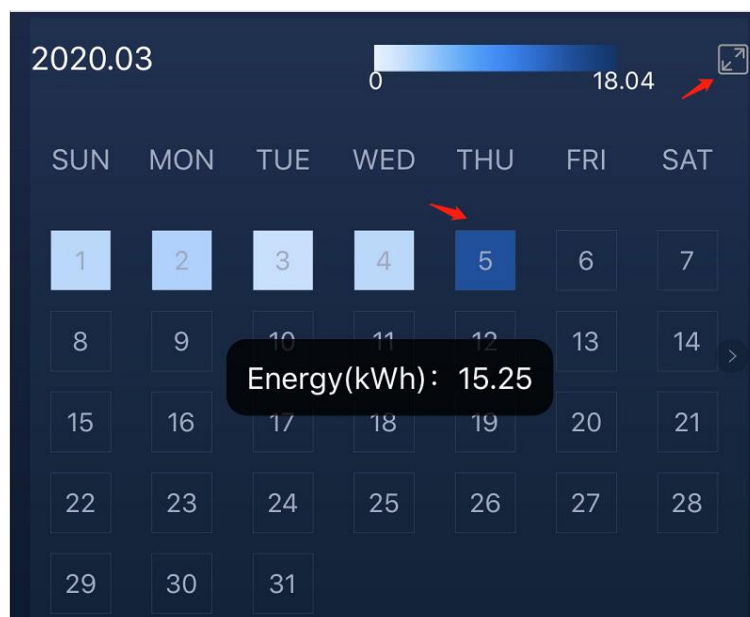


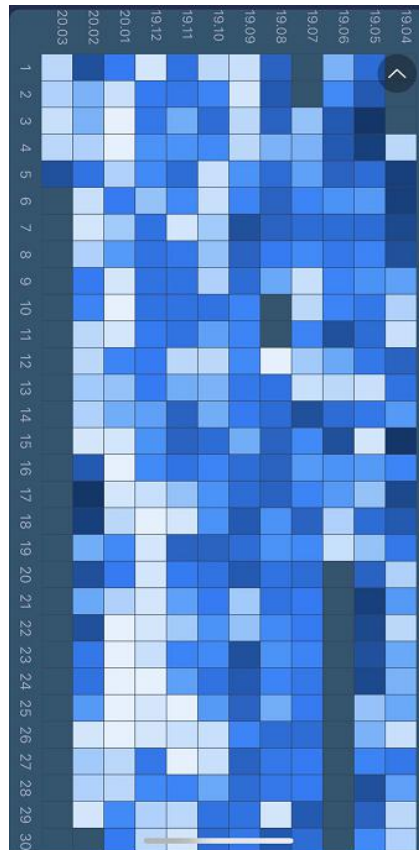


3.5 Click the "Information" button to view the basic information of the owner.


Statistics	Information	comm_relationship
Station	DEMO_3kW	
Capacity	3kW	
On-grid type	--	
Position	中国浙江省杭州市拱墅区康泉路18号 邮政编码: 310015	
Address	--	
First name	DEMO	
Last name		
Phone number		
Login account	customer_demo	
Email		
Ownership Org	Installer-Demo	
Installer informati...	17600000000	
Time zone	(UTC+08:00) Beijing,Chongqing,Hong Kong,Urumqi	
Installation time	2019-04-04 11:43:09	

3.6 Click “comm_relationship” button to view the communication status of devices.

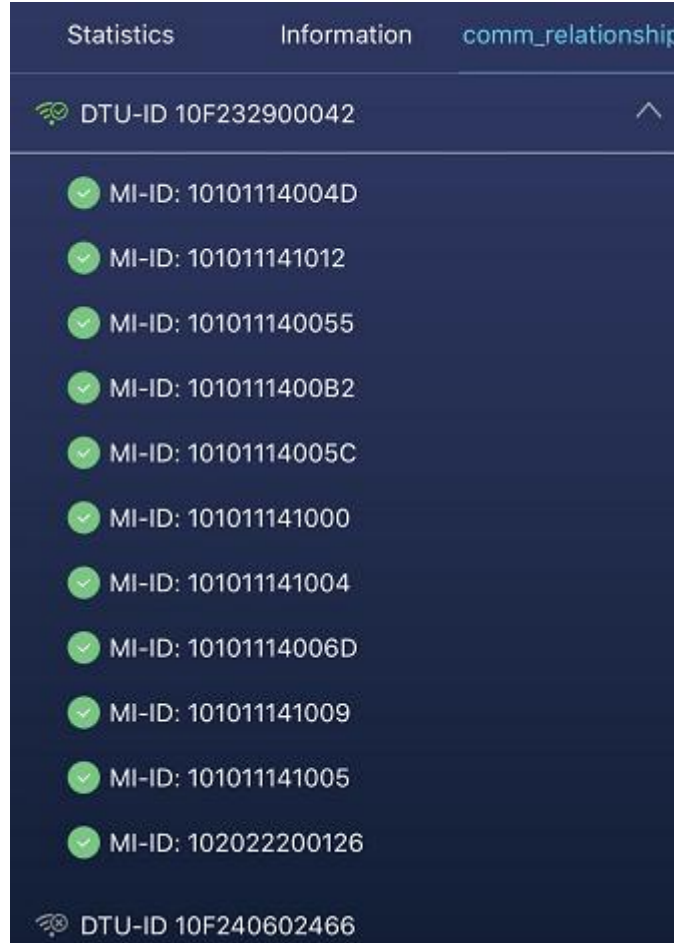

3.7 Click on the icon in the top right corner to enter the physical map interface to see the power of one day.

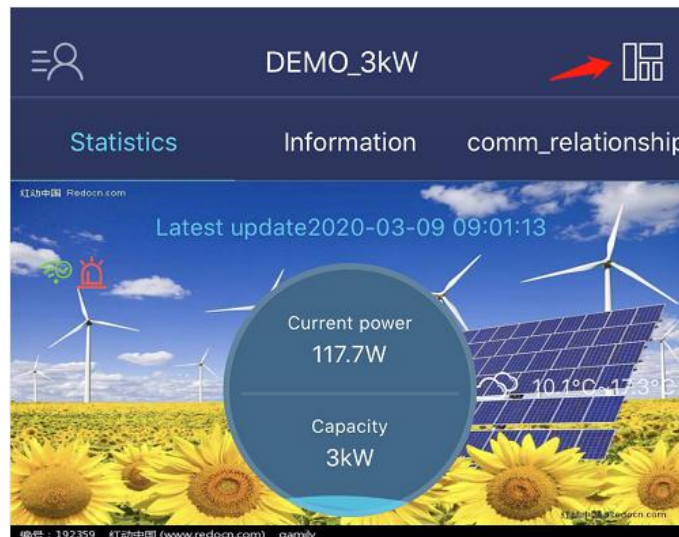


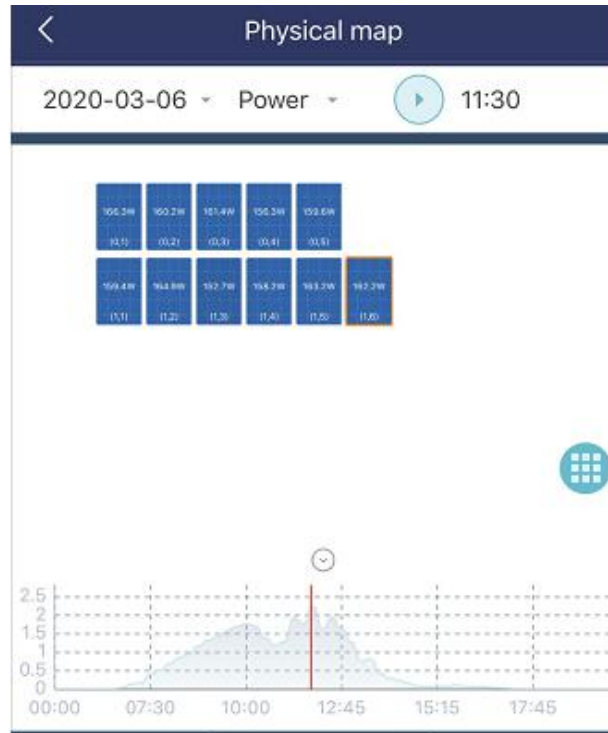


3.8 Click the drop-down button on the right of power to select the “Energy” button to view the day's energy.




3.9 Click the drop-down button on the right of the day to view weekly, monthly, yearly and total energy generation.

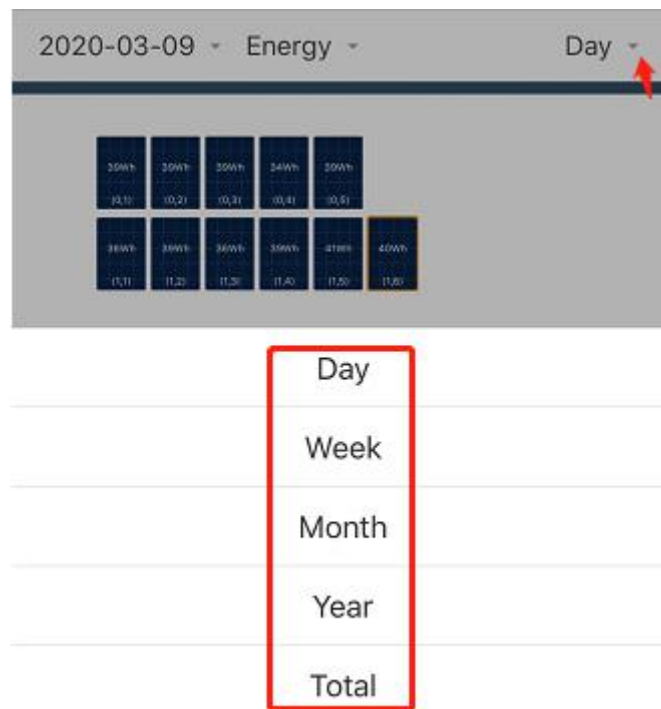


3.10 Click on the icon in the top right corner to enter the personal center interface.

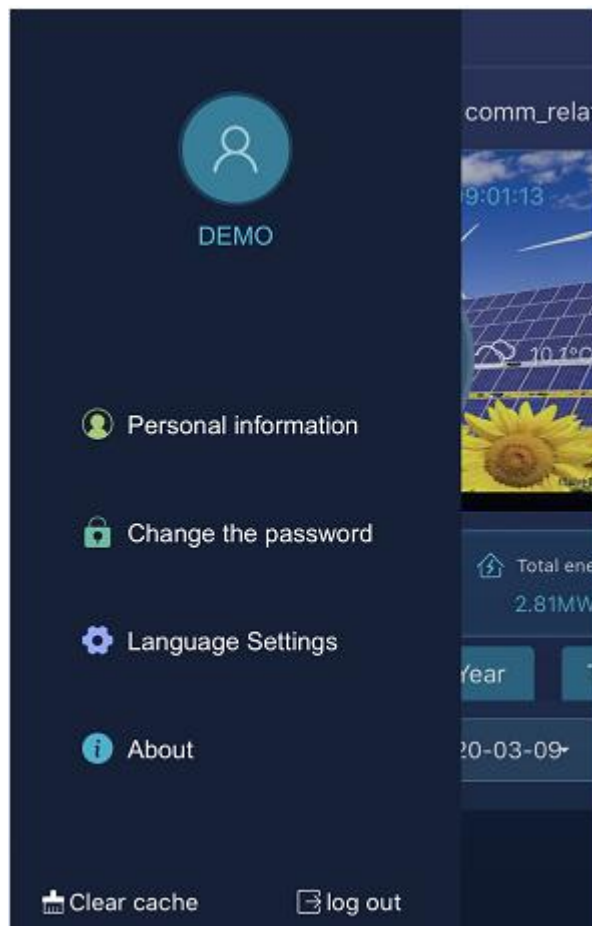


3.11 Click the “Personal Information” button to view account information and so on.

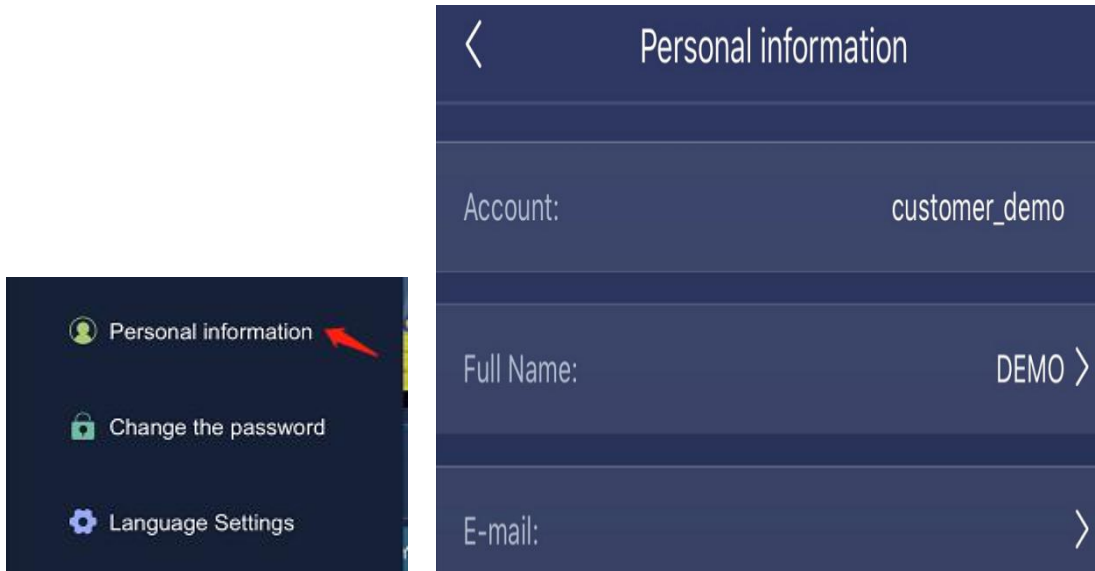


3.12 Click “Change the password” button, enter old and new password, you can modify the owner's login password.

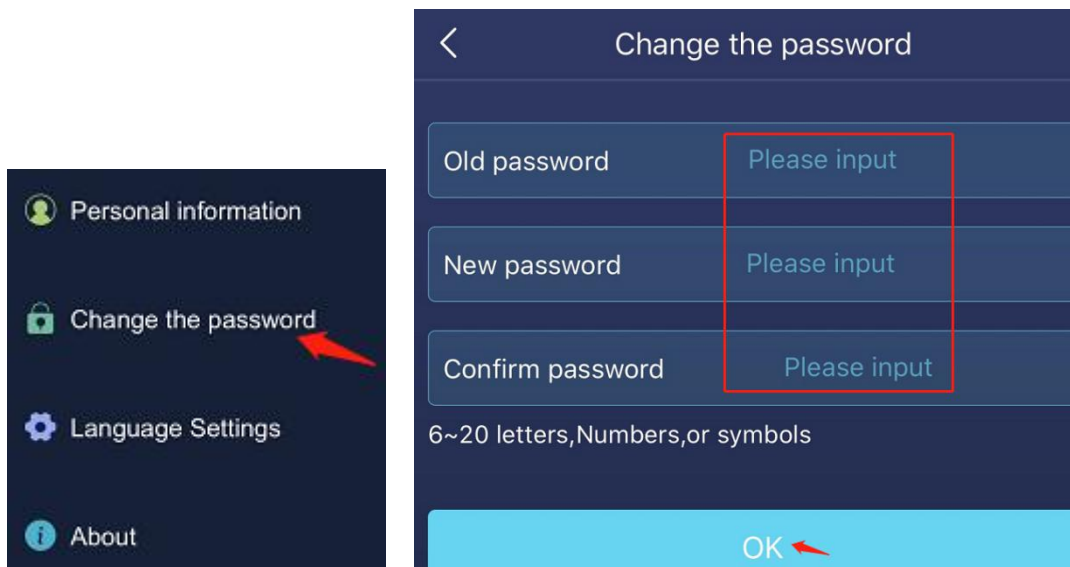

3.13 Click “Change Language” button to select the language you want.

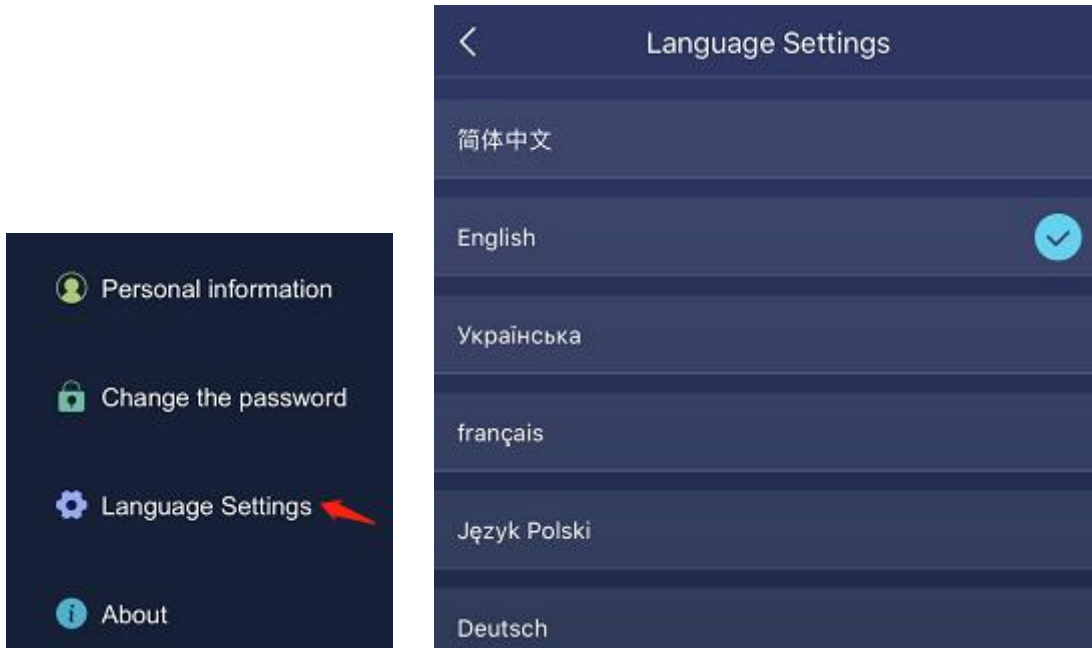

3.14 Click "About" button, view software version.

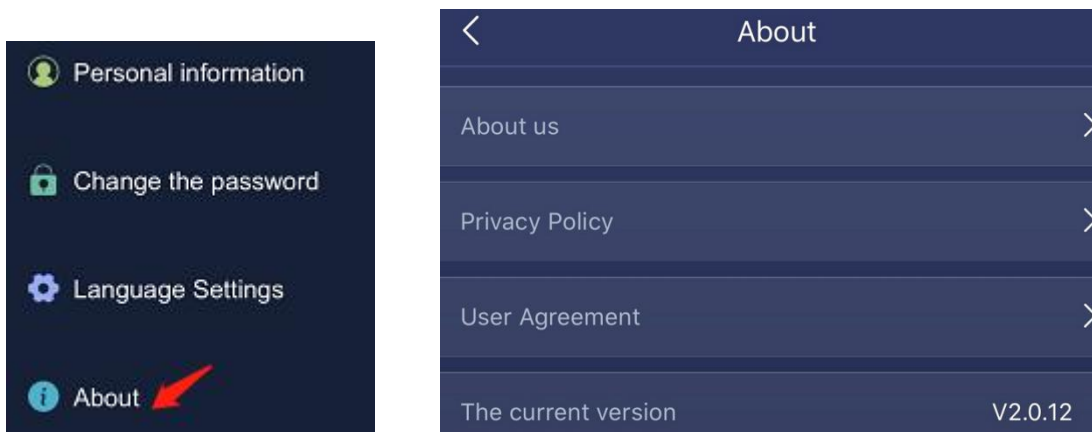

3.15 Click "log out" button, exit account login.

