

PC Interface Introduction for End User

1. Brief Introduction of PC Interface

Hoymiles monitoring server provides the module level smart monitoring, end user can login the server through Google browsers to check the performance of PV system, module-level data in real time, operating status and download the energy and power reports etc.

2. How to start ?

Please contact your distributor or installer to obtain the end user account and password, then input the account and password and click log in.




Note: the website link is <https://m.hoymiles.com>

3. Interface Introduction

3.1 Power station homepage - display the overview information.



3.2 Click the box in the picture below to enter the revenue calculation interface.

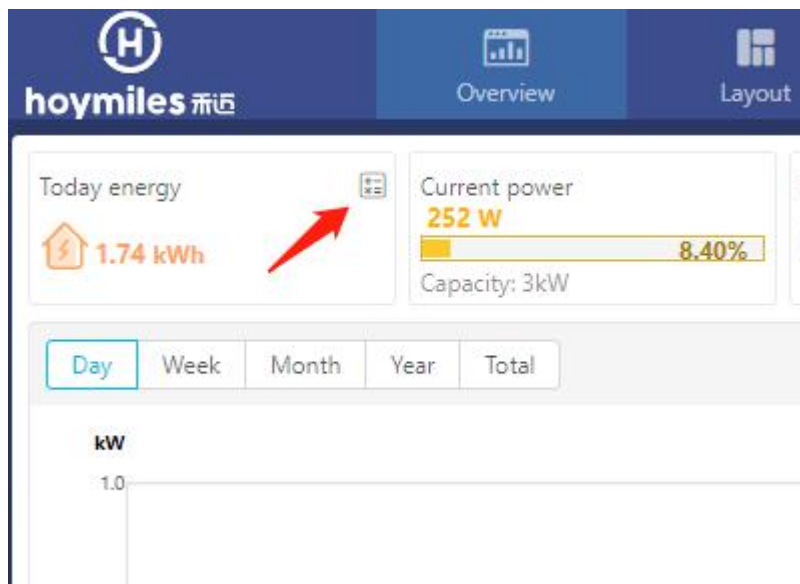

Revenue calculations

Unit price: /kWh

Currency unit:


Today energy: 1.74kWh Income: 2.08MUR

Total energy: 2.81MWh Income: 3374.35 MUR


3.3 View daily, weekly, monthly, yearly, and total power generation.



3.4 Click one day you can look at the energy of that day.

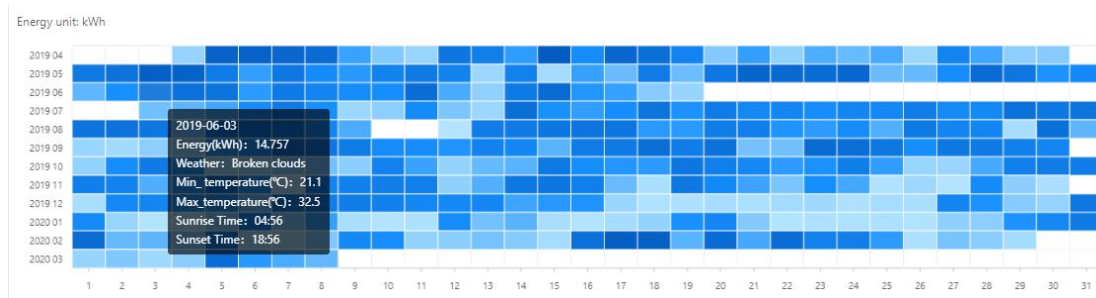


3.5 DTU communication status and microinverter alarm status are displayed respectively.

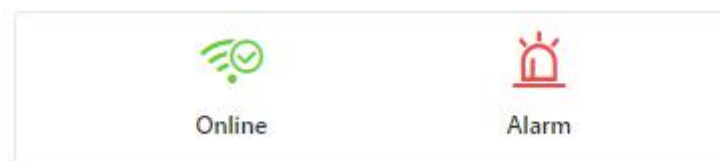


3.6 Click "Layout" button to see the power of one day for all modules.




3.7 Click on a module to view the module information.

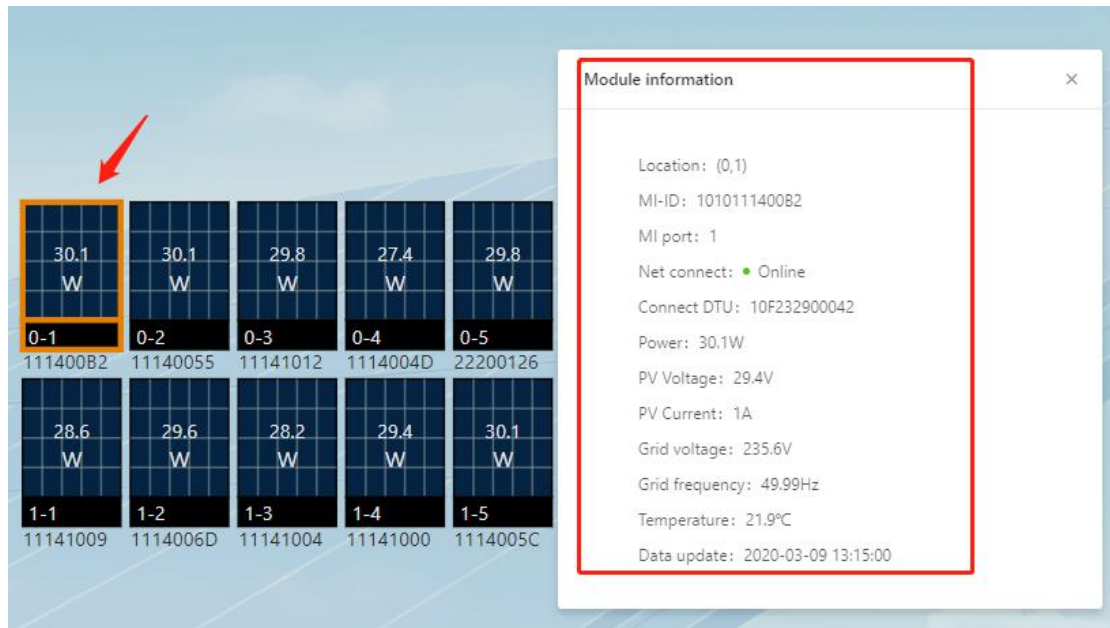


3.8 Click the drop-down button on the right of power and select the “energy” button to view the day's energy.

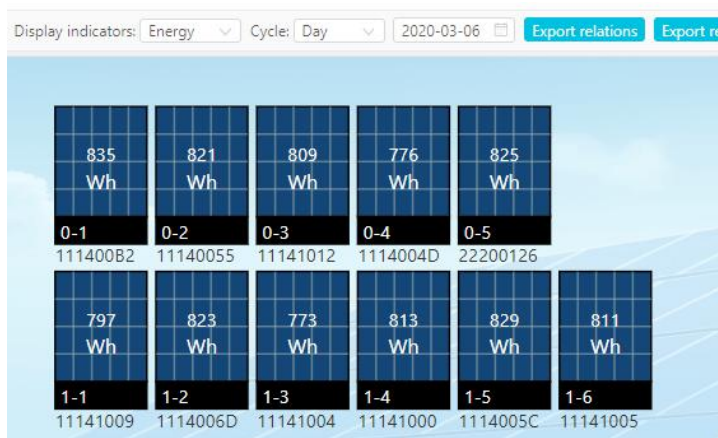


3.9. Click the drop-down button on the right of the day to view monthly, yearly and total energy generation.

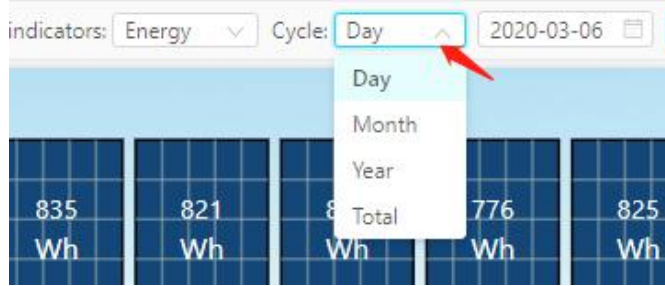



3.10 Click “Device” button to view the communication status of devices.

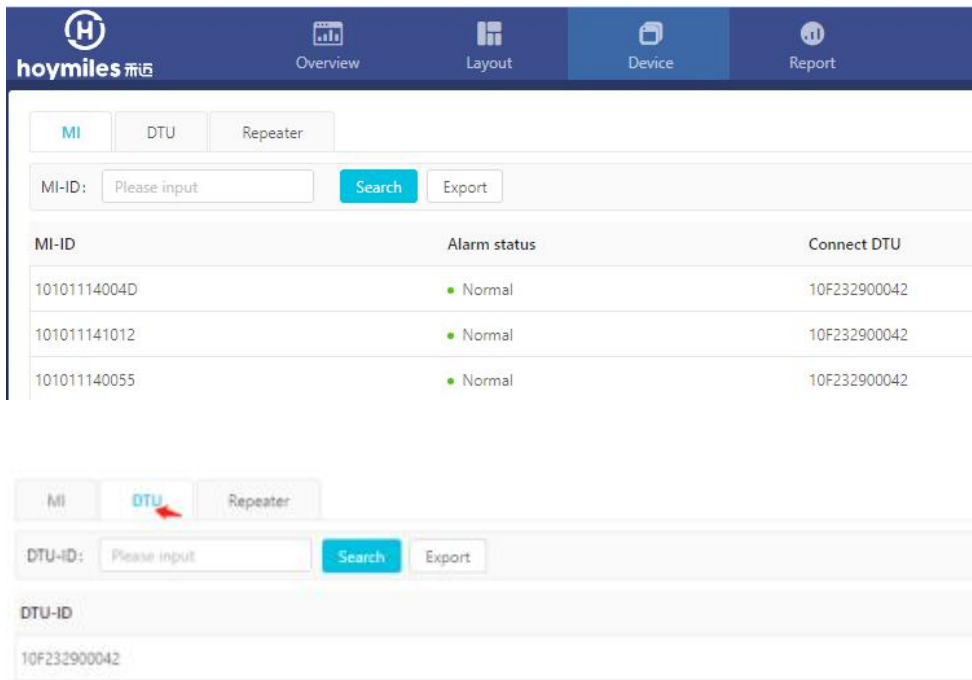


3.11 Click the “Export” button on the right side to download the device form.

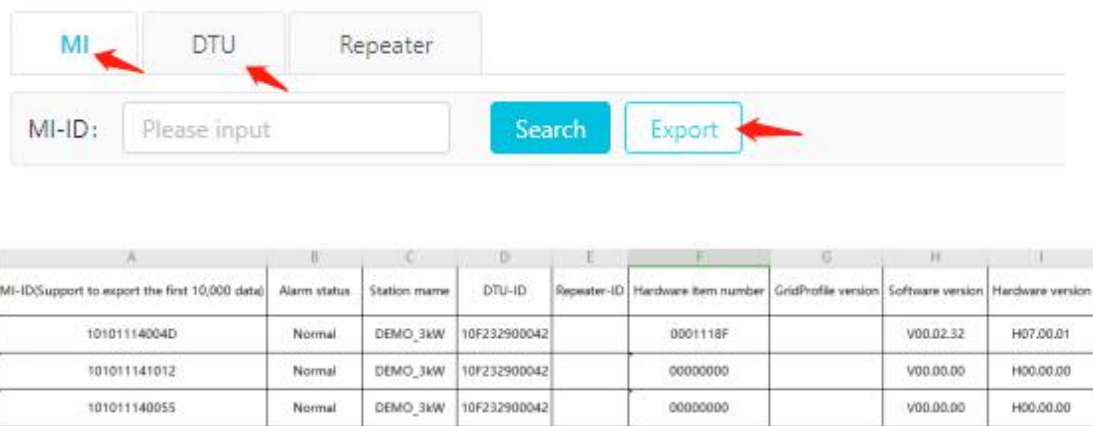


3.12 Click the “Report” button to export energy and power reports.

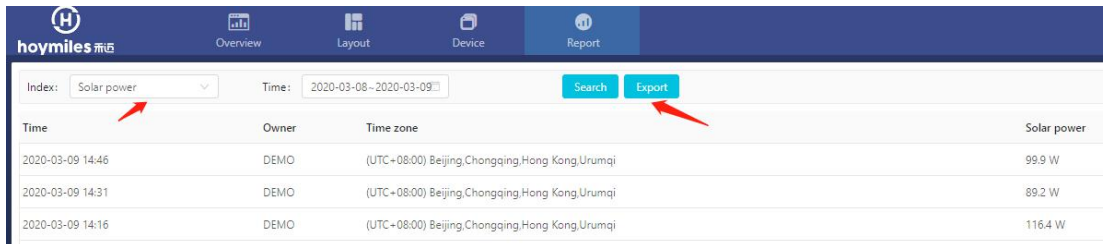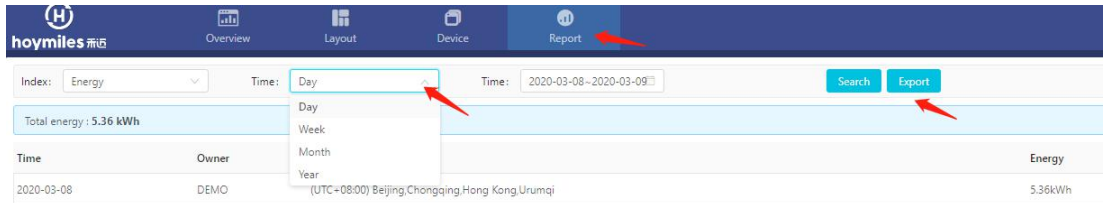

3.13 Click on the icon in the upper right corner to enter the personal center interface.

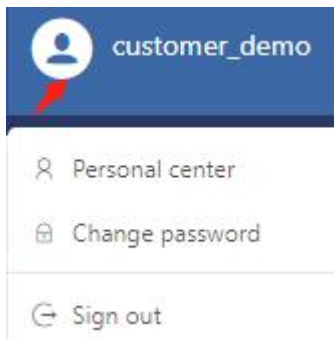

3.14 Click the “Personal information” button to view and modify login account and so on.

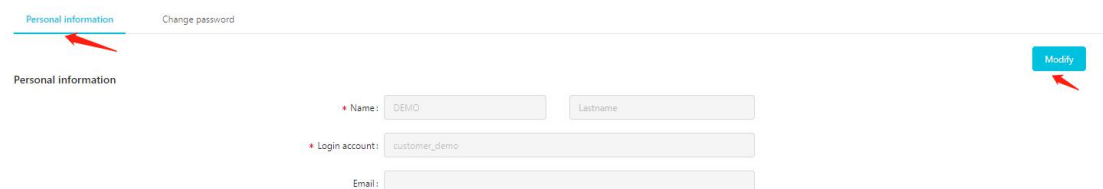

3.15 Click “Change password” button, enter new password, you can modify the

owner's login password.



Change password


Save

* Old password:

* New password: Please input a new password

* Confirm password: Confirm password

3.16 Click "Sign out" button, exit account login.

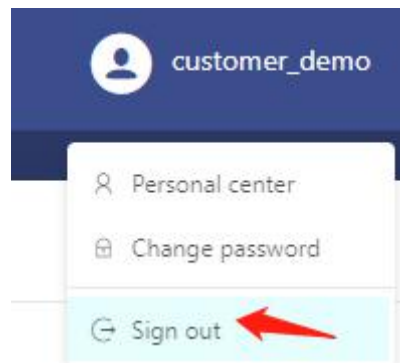

3.17 Click the drop-down button on the right of English to select the language you want.

